

# Electric boilers

An electric boilers with safe values!







# Quality

We help you to complete your project for free. Our products can be easily install by yourself!



# Reliability

Our electric boiler work without electronics. Our electromechanical technology is lifelong changeable.



## 2 years warranty

Spare parts for all products are available and our European manufacturing guarantee quality products.



Silent





# Electric boiler **Mini Europe**


Our mini electric boiler for easy installation in your central heating network.

Multi energy compatible with all hydraulic systems: Radiator, underfloor heating ...



Guaranteeing your comfort and your savings, a bi-wire terminal block is provided in the boiler in order to install a regulation system (room thermostat) compatible.

# Without pump

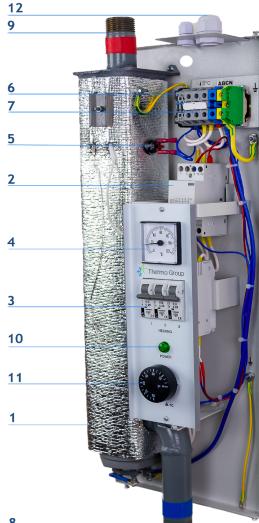

### 8



It is important to select the right power of its boiler to optimize the electric subscription and thus limit the cost of installation (power cable section, circuit breaker, ...).

### **Personal advice:**

Our heating expert calculates free of charge a heat loss report of your home allowing to define the power to install.

## Equipment

1. Insulated stainless steel heater

- 2. Quiet Switch ETI
- 3. Power Circuit Breakers ETI
- 4. Thermostat
- 5. Overheating protection 80°C
- 6. Connection for room thermostat
- 7. Power supply terminal block
- 8. Cold water connection ET 1"
- 9. Hot water connection ET 1"
- 10. Power LED

11. Network temperature setting

12. Cable gland power cable

<b>Optional accessorie</b>	s
----------------------------	---

REFLEX 18L	Expansion vessel 18 liters for heating network		
REFLEX EXDIRT	Dirt separator for heating network		
REFLEX EXVOID	Microbubble for heating network		
SPCO FGD25-6	Heat circulating pump Energy class A 7 meters for heating network		
FLEXIBLE 1,50 M	Flexible adjustable up to 1.5 m		
CABLE	Power supply cable to connect the electric boiler		
POWER BREAKER	Circuit breaker and Differential switch to Pro- tection of the installation on the dashboard of the housing		
ROOM HERMOSTAT	Mechanical Room ther- mostat 5 ° C to 30 ° C Belux Watts, cable		
EMPERATUR	20°C-60°C on ducts, as a security for a heating floor		

Reference	Power (kW)	Adjustable Power	I-1 phase (A)	I-3 phases (A)
MINIEU4.5	4,5	1,5 - 3 - 4,5	20	6.5
MINIEU6	6	2 - 4 - 6	26	9
MINIEU9	9	3 - 6 - 9	39	13
MINIEU12	12	4 - 8 - 12	52	17
MINIEU15	15	5 - 10 - 15	-	22

H660 x W220 x D110 - Weight : 11 Kg



thermogroup.com